

Transparency[®] Adaptive

Cabinets
Controllers
Signals
Signs
Software
Specialty



Overview

McCain's Transparency[®] Adaptive autonomously generates optimal signal timing parameters across an arterial network by adjusting cycle lengths, phases, and offsets based on prevailing traffic. As there is no "one size fits all" solution to improve traffic flow, *Transparency Adaptive* provides a suite of synchronization strategies to improve operations and mobility. Whether implementing optimized coordination parameters, invoking peer-to-peer synchronization, or triggering historically effective timing plans for peak periods, McCain's assortment of adaptive technologies are effective for the unique roadways within your agency.

Benefits

- Improve arterial performance by adjusting to real-time traffic demand
- Reduce stops, delays, and travel time
- Boost intersection efficiency and mobility
- Minimize congestion and idle-time emissions
- Reduce signal timing engineering efforts and prolong timing effectiveness
- Program and maintain with ease
- Connected vehicle ready

Product Description

McCain's *Transparency Adaptive*, a component of *Transparency TMS* and *Omni eX[®]* intersection control software, utilizes real-time traffic information to optimize signal timing and ultimately reduce congestion and/or side street delay along coordinated roadways.

As each roadway presents unique challenges and characteristics, *Transparency Adaptive* offers customizable adaptive strategies that can be used alone or in conjunction with one another for improved traffic flow.


Synchronization strategies include discrete activation criteria, multiple modes of operation and progression tactics, and weighting factors that empower users to assign preference to all considerations.

Track, analyze, and validate traffic flow improvements with internal reporting metrics.

Adaptive Display Screenshot



Time Space Diagram

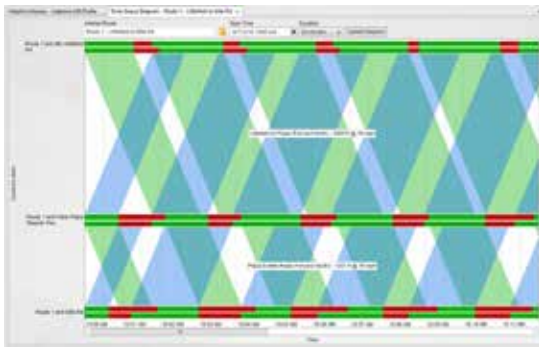

How it Works

Analyze Real-Time Traffic Conditions

Collect data from existing detection technology to identify demand trends including:

- Signal phase demand
- Arterial volume
- Directional volume
- Link speed

Calculate Optimal Signal Timing

Determine new signal timing parameters along the corridor to meet changing demand. Impacted factors include:

- Fluid cycle length according to arterial volume
- Equitable distribution of phase splits
- Optimization of offsets with weighting factors for preferential, semi-preferential, and balanced direction of travel

Measure Performance

Validate and verify the effectiveness of adaptive operations by viewing real-time records of:

- Split utilization and phase demand
- Phase reason for termination
- Cycle length requests and changes
- Detector volume and occupancy reports

Enhance performance reporting with McCain high-resolution data reporting, that also provides:

- Arrivals on green versus red (approach volume)
- Green red occupancy ratio (Purdue phase termination)
- Platoon ratio / arrival type
- Phase wait time

System Specifications

System Requirements

- *Transparency* TMS (see separate brochure)
- McCain Omni eX® controller software (see separate brochure)

Detection Requirements

- Stop-bar detection (minimum requirement)
- Advanced detection (ideal – not required)
- Mid-block system detection (ideal – not required)

Compatibility

- All industry standard detection types
- ATC 2070 or NEMA controllers
- FLeX™ controller
- All cabinet types including, but not limited to, Caltrans 332, NEMA TS 1 and TS 2, ITS, and ATC cabinets
- Ethernet, serial, or wireless communication

To learn more about
McCain's Integrated Traffic
Solutions, please contact
info@mccain-inc.com or
call (760) 727-8100

